

IBM SurePOS 500 Series



Highlights

- Features a virtually tool-less design on select models that helps enable fast, easy service, which helps to reduce your total cost of ownership
- Supports a broad range of applications and includes models that meet many specialized retail requirements
- Offers IBM-tested peripherals that are system-matched to help speed implementation and provide a unified appearance
- Combines extensive global service and support from IBM

Innovative technology meets smart design

The IBM SurePOS™ 500 Series delivers the style, serviceability and state-of-the-art technology retailers need to help optimize the customer experience in food service, hospitality, specialty and gas and convenience. These sleek systems add visual appeal to any location as well as a space-saving footprint. A virtually tool-less design makes service fast and easy, which helps reduce onsite service calls and helps lower total cost of ownership (TCO). Systems management technology enables centralized control to increase efficiency and lower IT support costs.

Intelligent, affordable choices for your store

The IBM SurePOS 500 Series provides outstanding flexibility. Each system can support multimedia capabilities and can be configured with an array of system-matched peripherals. These IBM-tested peripherals are designed to work with the SurePOS 500 Series, which helps reduce the risk of integrating components from multiple vendors.¹ You can also select from a diverse variety of application software from authorized IBM Business Partners to help enhance customer service, drive loyalty and differentiate from your competitors.

Convenient, streamlined design

Every model of the SurePOS 500 Series is designed for easy service. On select models, a virtually tool-less design makes it easy to access all replaceable units, including the hard drive and power supply. This feature improves usability and helps to minimize downtime in the event of an outage. Plus, it helps reduce the need for service visits.

Industry-leading infrared touchscreens

Most models of the IBM SurePOS 500 Series offer next-generation infrared (IR) touchscreen displays, which maintain high levels of transaction accuracy and speed. Choose from 12-inch, 15-inch or 17-inch screen size. All three allow users to view multiple applications simultaneously, and the 17-inch option provides maximum onscreen display area at its native resolution. Unlike other touchscreens, IR displays do not require plastic overlays that reduce brightness and are susceptible to scratching. A higher contrast ratio provides vivid, well-defined characters and buttons, and a wider viewing angle helps improve

visibility. Best of all, fixed optical alignment helps eliminate recalibrations.

Data storage flexibility

With an internal 4GB modular flash drive, the IBM SurePOS 500 Series provides a new level of data storage flexibility. It allows you to store transaction data separately from the hard drive, adding a layer of redundancy. The drive can also be used to store a backup version of the system configuration to promote faster recovery from hard disk failure.

Flexible, easy retail connectivity

With USB, serial and PC card connectivity, the IBM SurePOS 500 Series makes it easy to connect a broad range of printers, scanners, PIN pads, cameras, biometric devices, RFID technology and wireless communications. Powered USB ports allow you to operate peripherals directly from the system unit without external power bricks. Enhanced wireless integration provides coverage and flexibility to help retailers meet country-specific requirements.

Extreme reliability and durability

The IBM SurePOS 500 Series is designed to help withstand severe thermal and humidity thresholds, extensive vibration, power fluctuations and radio interference. This retail hardening helps your IBM SurePOS 500 system thrive under grueling wear and tear in demanding specialty and food service environments.

Open platform for the latest POS software


With an open systems architecture, the IBM SurePOS 500 Series helps you integrate new technologies as your needs change. In addition, these systems support diverse third-party applications, including Ready for IBM Retail Store Innovations solutions.² This initiative helps IBM Business Partners validate their solutions on IBM POS systems, so retailers can implement new technologies confidently.



IBM SurePOS 500 Series model highlights				
Model 565	Performance multimedia			
	High brightness, active matrix	PC card slot		
	IR touchscreen (12", 15" (standard) or 17")3	 Headphone and microphone ports 		
	 Super-wide viewing angle 	 Stereo speakers and onboard audio system 		
	 Optional modular flash drive 	Dual video		
	 Virtually tool-less design 			
Model 545	Performance standard			
	High brightness, active matrix IR touchscreen	Super-wide viewing angle		
	(12", 15" (standard) or 17") ³	 Virtually tool-less design 		
	 Optional modular flash drive 	• Dual video		
Model 544	Value standard			
	 High brightness, active matrix IR touchscreen (12" (standard) or 15")³ 	Super-wide viewing angle		
Model 514	Entry standard			
	• 12"3 resistive touchscreen			

IBM SurePOS 500 Series at a glance					
Product name	SurePOS 514	SurePOS 544	SurePOS 545	SurePOS 565	
Model number	4851-514	4840-544	4846-545	4846-565	
Microsoft® Windows® Embedded for Point of Service Preload⁵	4851-E14	4840-E44	4846-E45	4846-E65	
Processor ⁶	1.2GHz VIA Processor (133MHz FSB)	2.0GHz Intel Celeron (400MHz FSB)	2.53GHz Intel Celeron D (533MHz FSB)	2.53GHz Intel Celeron D (533MHz FSB)	
System dimensions and weight	(without MSR)			1	
Maximum dimensions (WxDxH)	12": 12.6x12.8x15.1"/ 321x325x384mm	12" (standard): 12.6x12.8x15.1"/ 321/325/384mm 15": 15.1x13.3x16.1"/ 383x338x410mm	12": 12.12x12.47x14.09"/ 308x317x358mm 15" (standard): 14.53x12.77x15.03"/ 369x324x382mm 17": 15.84x13.2x15.93"/ 402x335x405mm	12": 12.12x12.47x14.09"/ 308x317x358mm 15" (standard): 14.53x12.77x15.03"/ 369x324x382mm 17": 15.84x13.2x15.93"/ 402x335x405mm	
Weights	12": 23lbs/10.5kg	12": 23lbs/10.5kg 15": 24.5lbs/11.1kg	12": 25lbs/11.36kg 15": 27lbs/12.27kg 17": 32lbs/14.55kg	12": 25lbs/11.36kg 15": 27lbs/12.27kg 17": 32lbs/14.55kg	
Storage	1	I	1		
System memory ⁷	256MB (2GB maximum)	256MB (2GB maximum)	512MB standard (2GB maximum)	512MB standard (2GB maximum)	
Video memory ⁸ (shared with system memory)	8MB to 64MB UMA	8MB to 64MB UMA	Up to 128MB of shared memory	Up to 128MB of shared memory	
Hard disk drive ⁷	40GB or higher Serial ATA	40GB or higher IDE	80GB or higher Serial ATA 2	80GB or higher Serial ATA 2	
Expansion slots					
PC card slot	0	0	0	1	
Wireless kit	1	0	1	1	
Independent second video	_	-	Yes	Yes	
Connectivity	•				
Powered USB (12V)	0	1	1	1	
Powered USB (24V)	1	1	1	1	
Standard PC USB	4	6	7	7	
RS-232	1 powered; 3 standard	1 powered; 3 standard	1 powered; 3 standard	1 powered; 3 standard	
Parallel port	0	1	0	0	
PS/2 keyboard/mouse	Dedicated PS/2 keyboard port and mouse port	1 side; 1 back	PS/2 keyboard/mouse	PS/2 keyboard/mouse	
RJ45 Ethernet	1	1	1	1	
Secondary video port	0	S/VGA	S/VGA	S/VGA	
Audio mic-in/line-out	0	0	0	1	
Headphone	0	0	0	1	
Cash drawer port (24V)	2	2	2	2	

Peripheral options ⁹					
Secondary displays	IBM SurePoint™ Solution (touch and nontouch) Distributed, pole-mounted, 40-character customer display	Integrated 40-character customer displayAll-points-addressable character graphics display			
Printers	IBM SureMark standard and fiscal printers				
Keyboard	CANPOS keyboard (includes 32 programmable keys, numeric keypad and pointing device)				
Cash drawer	• Full-size	Compact			
Integration trays ¹⁰	Fits on full-size and compact cash drawers, as well as countertop				
MSRs	Three track	• JUCC			
Industry standards					
Systems management	Remote Management Agent (RMA) SMBIOS Wake on LAN® (WOL)	Pre-Boot Execution Environment (PXE) Wired for Management (WfM)			
Power management	• APM	• ACPI			
Software					
Operating systems supported ¹¹	Microsoft Windows 2000 Microsoft Windows XP Professional Edition IBM Retail Environment for SUSE Linux (IRES)	Microsoft Windows XP Embedded for Point of Service (WEPOS) IBM PC DOS 2000			
Drivers supported	UPOS (OPOS and JavaPOS™)				
Services					
Limited warranty service ¹²	One year depot or onsite service				
Service pacs	Multi-year additional service available				
Technical support ¹³	24x7 phone support (during warranty period) and Web-based help				
Service availability	Up to 7 years following withdrawal from the market				

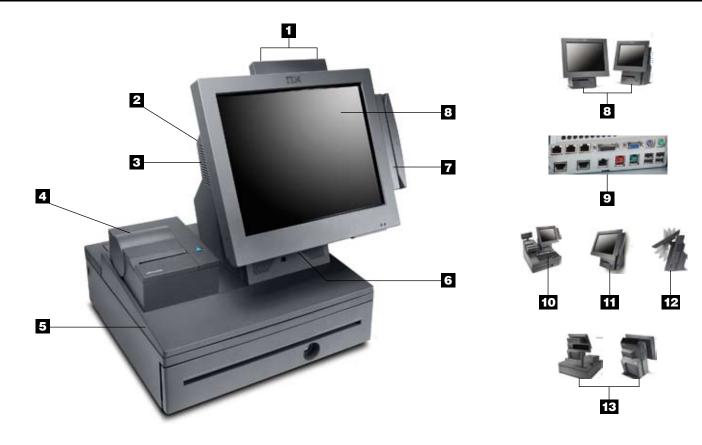

- 1 Industry-standard wireless connectivity allows flexible, mobile placement, so you can locate systems virtually anywhere in your store
- 2 2.53GHz Intel® Celeron® D processor helps deliver peak multimedia performance (models 565 and 545 only)
- 3 Cooling tunnel technology helps keep the processor cool and the circuit board clean
- 4 IBM SureMark™ printers provide fast, quiet, two-color thermal printing
- 5 Integration trays help create a clean, organized appearance
- 6 LED message center displays system status

- 7 Programmable magnetic stripe reader (MSR) accepts foil and resort cards
- 8 Spill-resistant IR touchscreen available (17", 15" or 12")
- 9 Quick service ports including Ethernet 10/100 LAN, RS-232 and standard and powered USB, help enable easy maintenance, provide industrystandard connectivity options and operate peripherals directly from the system unit without power bricks
- 10 Compact alphanumeric (CANPOS) keyboard with pointing device helps save space
- 11 Wall-mount helps provide placement in space-restricted areas (models 544 and 514 only)

- 12 Wide tilt range for viewing
- 13 Second independent display delivers customer information and digital merchandising
- 14 Virtually tool-free design makes it easier to perform service (models 565 and 545)
- 15 Remote display function enables positioning of display unit up to six feet away from system unit
- 16 Internal 4GB modular flash drive offers data storage redundancy and can back up the system configuration for faster recovery from hard disk failure (models 565 and 545)



For more information

To learn more about the IBM SurePOS 500 Series and other POS solutions from IBM, contact your local IBM representative or visit:

ibm.com/products/retail

To place an order, call 1-866-348-3454 or 1-770-863-1000 outside the U.S. and Canada.

- The compatibility information provided by IBM should be used as a guide only, since hardware and software levels and releases may vary, and numerous hardware and software combinations are possible. IBM makes no representation or guarantee regarding the compatibility of specific hardware or software products. Unless otherwise specified, warranty, service and support for non-IBM products are provided directly to you by the product manufacturer, supplier or publisher of the product.
- The Ready for IBM Retail Store Innovations mark and the trademark contained therein are trademarks of the IBM Corporation and are used under license. IBM is not the licensor of IBM Business Partners' products or services and makes no warranties, express or implied, including any implied warranties of merchantability or fitness of a particular purpose. Statements made by IBM Business Partners that offer Ready for IBM Retail Store Innovations products are provided by the relevant third-party and not IBM.
- Screen sizes: 12" offers 800x600 pixels, 15" offers 1024x768 pixels and 17" offers 1280x1024 pixels.
- Some features are optional and model-dependent.
- ⁵ Microsoft preload terms, restrictions and conditions described in the End User License Agreement.
- 6 MHz/GHz only measures microprocessor internal clock speed; many factors affect application performance.
- 7 MB/GB equals one million/billion bytes when referring to storage capacity; accessibility may be less.
- 8 Memory supports both system and video. Accessible system memory will be the installed memory size less the amount defined for video.
- 9 Only available in some countries. Ask your IBM representative for details.
- ¹⁰ A compact integration tray is not available for the 4846 models 545, E45, 565, E65.
- With the exception of the Microsoft Windows Embedded for Point of Service Preload models, an operating system is not included and can be purchased separately.
- For a copy of terms and conditions of IBM's statement of limited warranty, contact your local IBM representative or reseller.
- 13 Geography dependent.

© Copyright IBM Corporation 2007

IBM Retail Store Solutions 3039 Cornwallis Road, Box 12195 Research Triangle Park, NC 27709 LLS A

Printed in the United States of America 05-07

All Rights Reserved

Without warranty of any kind, either express or implied, including the implied warranties of merchantability or fitness for a particular purpose. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions; therefore, this disclaimer may not apply to you.

- ® IBM, the IBM logo, the Ready for IBM Retail Store Innovations Mark and the trademarks contained therein, SureMark, SurePoint, SurePOS and Wake on LAN are trademarks of International Business Machines in the United States, other countries, or both.
- ® Intel and Celeron are registered trademarks of Intel Corporation in the United States, other countries, or both.
- ™ Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.
- ® Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product and service names may be trademarks or service marks of others.

References in this publication to IBM products or services do not imply that IBM intends to make them available in all countries in which IBM operates.

The IBM home page can be found at **ibm.com**.

Printed in the United States on recycled paper containing 10% recovered post-consumer fiber.

Cover shows SurePOS 500 Series model configured with optional component: programmable MSR.

Page 5 shows IBM SurePOS 500 Series model configured with optional components: integration tray, cash drawer, IBM SureMark Printer, programmable MSR and wireless hood.